

2. Contrast ratio

Press the "MENU" button to switch to contrast ratio options, then press UP and DOWN arrow key on the panel or on the remote control to adjust the contrast ratio of screen, the value of contrast ratio can be set varies from 0-100, Save the Settings as soon as retreating from menu.

3. Saturation

Press the "MENU" button to switch to saturation options, then press the UP and DOWN arrow key on the panel or on the remote control to adjust the saturation of screen, the value of saturation can be set varies from 0-100, Save the Settings as soon as retreating from menu.

4. Language

Press the "MENU" button to switch to language options, then press UP and DOWN arrow key on the panel or on the remote control to adjust the language, the system can be set Chinese or English two kind of language, save the Settings as soon as retreating from menu. The system default is English.

5. Guide lines

There are 5 styles of guide line for selection according to the camera installation direction.

6. Flip Image

Press the "Cycle" button to flip image up / down / left / right

7. Reset

Press the "MENU" button to switch to reset options, then press UP and DOWN arrow key on the panel or on the remote control to adjust system parameters, the setup only suit for resetting brightness contrast ratio saturation, other parameters should reset by hand.

● Accessories

- 1. Remote control 1PCS
- 2. Power cable 1PCS
- 3. User manual 1PCS

USER MANUAL



7 INCH SPLIT MIRROR MONITOR
(KV-4136S)



7 INCH REPLACEMENT MIRROR MONITOR
(KV-4136)

Please read this manual carefully before operating monitor, and retain for future reference.

● Function and usage of products

1) Product Function

- 1. Size: 7"
- 2. Brightness: 600cdm²
- 3. Resolution: 1024xRGBX600
- 4. Dual video input, CVBS, 720P@25/30, 1080P@25/30
- 5. Signal System: PAL/NTSC/AUTO
- 6. AV2 priority, trigger activated
- 7. Power supply: DC9-32V
- 8. AHD1 / AHD2: Mirror / Normal
- 9. Working temperature: -25°C~70°C
- 10. Storage temperature: -30°C~80°C
- 11. Menu operation: Button / Remote

KV-4136S supports three cameras input

2) Product usage

This product uses high-resolution TFT color LCD screen, two video input, reverse video priority. And has features such as convenient installation, simple connection, no radiation, low power consumption, flicker-free, color is gorgeous and vivid, small and exquisite outlook, can be widely used in various car models.

● Instructions of facade

1) Panel operating instructions



1. V1/V2, Video input selection

2. Δ Value Increase

3. MENU Operation

4. ∇ Value Decrease


5. Power On / Off Key

6. Button: Image rotation

2) Replacement bracket



3) Electrical Connection Instructions

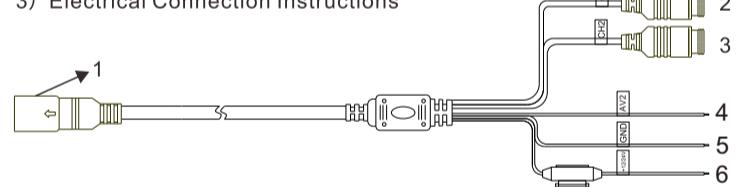

1. 9P Power line interface

2. 4P connector male side:

CH1 video channel signal input (AHD1);

3. 4P connector male side:


CH2 video channel signal input (AHD2);

4. Green electronic wire: Trigger and switch to CH2 video channel;

5. Black electronic wire: ground wire (GND cathode)

6. Red electronic wire: connect 12 to 24V dc power supply to the anode

4) Operating instructions for the remote control



1. Power on-off key

2. Video select: Image rotation

3. Analog +

4. Menu key

5. Analog -

6. Mode: Channel 1/channel 2 shift

5) The menu setup instructions

This machine can be set various parameters such as analog, setting method is as follows: In the state of startup, press the "MENU" button on the remote control or on the front panel to bring up a MENU of operating, then we can set the parameters such as brightness, contrast

ratio, saturation, language, Reversing delay, turn over, reset, etc.

press the "MENU" button on the remote control or on the front panel to proceed next MENU selection, then press the UP and DOWN arrow key on the panel or on the remote control to adjust specific numerical value (pictures as below).

1. Brightness :

Press the "MENU" button to switch to brightness options, then press the UP and DOWN arrow key on the panel or on the remote control to adjust the brightness of screen, the brightness value can be set varies from 0-100, Save the settings as soon as retreating from menu.