




Multi-function Portable Car Jump Starter User Manual



We recommend that you recharge your Maxxlee Jump Starter at least once every six months for optimal performance and prolonged use of the product, if not regularly used or while in storage.

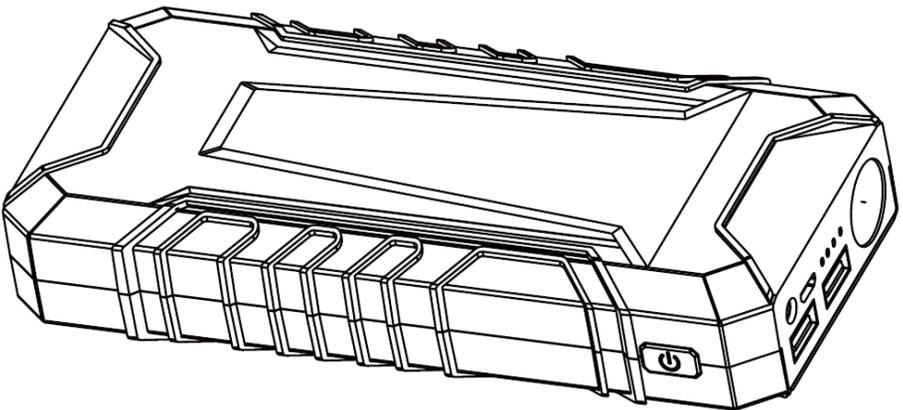


IMPORTANT SAFETY INSTRUCTIONS

PLEASE read this entire manual before attempting to use the product.

WARNING

1. Do not damage, drop or crush this item. Do not attempt to use this item or battery charger that has been dropped, punctured, run over or damaged in any way.
2. Do not charge this item in wet conditions (rain, snow, damp). Do not use this product in explosive environments (dust, bilge, gaseous, fumes or flammable materials).
3. Do not burn or incinerate this product. It may explode, causing personal injury or damage. Toxic fumes and other potentially harmful materials are created when the battery is burned.
4. Do not disassemble this product. It may result in risk of fire, electric shock or exposure to battery chemicals.
5. Do not insert foreign objects into ANY input or output ports. This item may short circuit. Any metal that comes in contact with the jumper cable port may short circuit. Short circuiting this product will damage the battery and may cause personal injury or fire.
6. This is a Lithium Ion battery. In the unlikely event that this product leaks battery chemicals, do not allow contact with skin, eyes or mouth as it may cause personal injury or burns. If skin is exposed to battery chemicals, wash with soap and water and rinse with vinegar. If your eyes come in contact with battery chemicals, immediately flush with water and then see a medical professional.
7. When recharging this item, make sure the area is well ventilated. Please do not smoke or allow open flames near a charging battery.
8. Never jump start a frozen battery.
9. Please keep the product away from and out of reach of children.
10. Do not expose the battery to temperature over +140°F (60°C) or below -14°F (-26°C)
11. IF the unit needs to be disposed of for any reason. It must be disposed properly by dropping it off at the nearest drop-off sites or Australian Battery Recycling Initiative (ABRI).
12. If the product malfunctions or is having problems, discontinue use and contact us at sales@elinz.com.au
13. Store this unit in a cool dry location.

PRODUCT INTRODUCTION

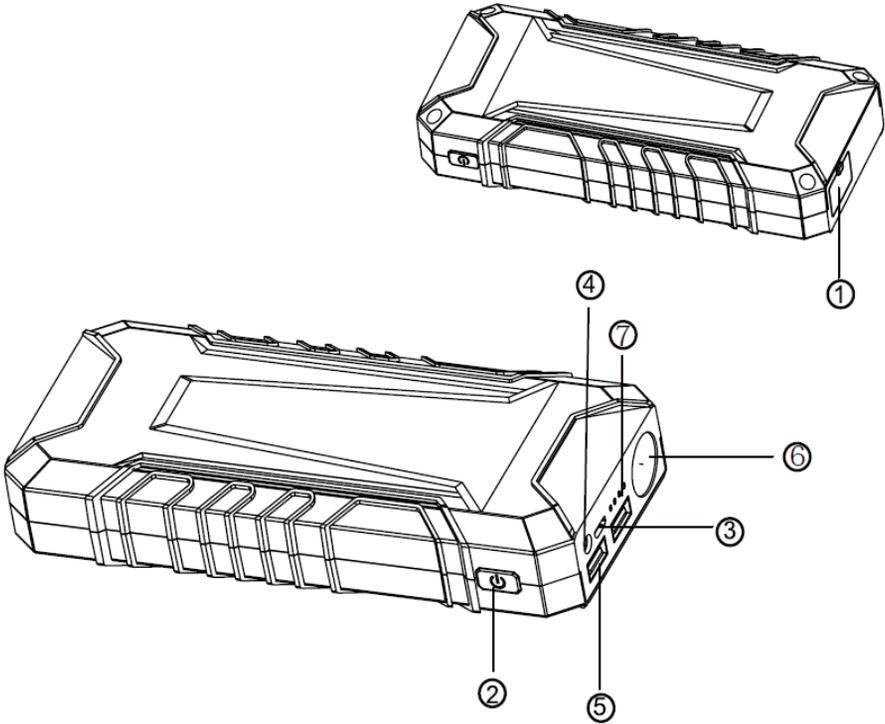

1. EC5 Vehicle Starting Output / Dust Cover
2. Power Switch
3. Micro USB Input: 5V-1A
4. DC Input: 15V-1A
5. USB Output 1 5V-1A / USB Output 2 5V-2.1A
6. LED Light
7. LED Indicator

BUTTON FUNCTION DESCRIPTION

 **Battery capacity query key:** Under the off state, short press  to start; the battery capacity indicator is on to display to current capacity and start the mobile battery function. If there is no any operation or not connected to other charging device after starting, the product will be automatically turned off.

Light mode: Long press the  button for three seconds to start the LED working light, long press again for three seconds may turn off the LED working light and . Under the light-on mode, short press  button to switch between “white lighting”, “SOS”, “flash light” .

White lighting: White light LED is on for a long time.

SOS: Three modes of LED light are one cycle→normal flash, slow flash and fast flash.

Check the battery starting capacity

- ◆ Before connecting to the power, please turn the switch to ON position and check if the battery capacity display satisfies the battery starting capacity conditions.
- ◆ The battery is low, please charge (the display screen is 100%) to use.
- ◆ Please charge in time under low-capacity conditions.
- ◆ prohibited to start the diesel engine under power alarm, low battery and power shortage conditions to avoid serious power damage.



Fully charged state



Low battery state



Under battery state







Insufficient voltage state



How to Jump Start a Vehicle

Make sure it is over 60% charged. If you have not used the product for more than two months, please charge it first.

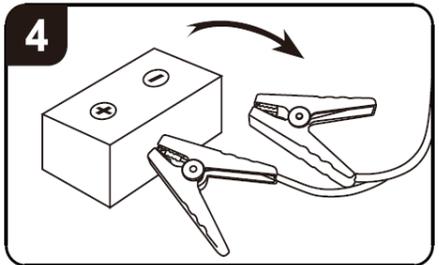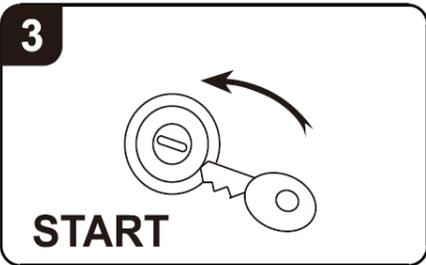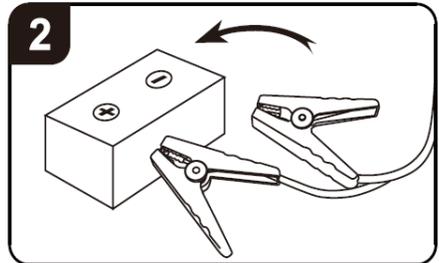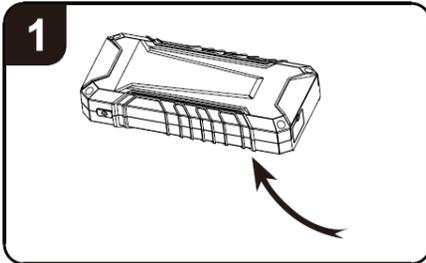

1. Connect the smart cable plug to the jump starter
2. Connect the red clamp to the positive "+" and the black clamp to negative "-" terminal on your vehicle's battery.
3. Start the vehicle
4. Disconnect clamps immediately from the battery after starting vehicle.



DO NOT crank the engine for more than 4 continues seconds while the unit is connected to the battery.

If the engine fails to crank or start, there may be a problem other than a discharged battery.



GENERAL INFORMATION

The peak current power 600A is capable of starting engines 5.0L Petrol and 3.0L Diesel 12V vehicles.

Product Charging - it supports micro USB 5V-1A and DC 15V-1A charging. Please select the corresponding connection line to recharge the product to avoid damaging the unit.

USB output - the product is equipped with standard USB output ports, providing maximum 5V-2.1A current output which can charge other standard USB device. Please use the original USB data line for the device you want to charge.

SPECIFICATIONS

Model	Maxxlee BCJS600L
Battery Capacity	16800mAh
Start Current	300A
Peak Current	600A
USB Output	5V-1A/5V-2.1A
Input Voltage	5V-1A/15V-1A
Charging Time	6 hours
LED Power	1W
Working Temperature	-10°C - 60°C
Product Size	172x75x33cm
Product Weight	400g



ONE YEAR LIMITED WARRANTY

Period of Coverage: This product is warranted to the original purchaser from the original purchase date for one (1) year and is subject to the Warranty Coverage described herein.

Warranty Coverage: This product is warranted by Maxxlee to be free from defects in material and workmanship.

This Limited Warranty does not cover defects or damage due to accidents, acts of God, misuse, abuse abnormal use, abnormal conditions, alteration to the product, attachment to any unauthorized accessory; loss of power; dropped or crushed product; tampering with or attempt to modify the product; unauthorized opening of the product; transportation damage; theft, vandalism, loss of use during the period of the products is at a repair facility or otherwise awaiting parts or repair; Failure to operate this product in accordance with the instructions provided in this Owner's Manual supplied with this product. If product is use for commercial or industrial purposes the warranty will be void.

DISCLAIMER: No warranty, written or oral, other than the above warranty is valid regarding this product. Manufacturer shall not in any way be liable to the purchaser or any third party for any damages, the purchaser or any third party may suffer because of use, intended or unintended or misuse of this product in conjunction with any device, equipment or accessory other than the appropriate device or equipment for which the product is designed.



If you have further questions or clarifications feel free to contact us at 1300 881 773, send us an email at sales@elinz.com.au or chat with us.