
T-M1025A

Instruction manual



Before operating the Monitor, please read this manual thoroughly and retain it for future reference.

Buttons Description



1: Power button

2: Decreasing the setting value

3: "MENU": Short press to open the OSD menu, return to the previous menu function setting / Toggle menu function/exit menu function setting

4 : Increasing the setting value

5: CAM- CH1/CH2/CH3 Channel Switch

6: N/A

7: N/A

8. Image Flip


9. R/C Window

Specifications

project		parameter
LCD Dimension		10"
System language		English , Simplified Chinese, other (can be customized)
Video	Video input	3 channels of 1080P, 960P, 720P, 960H, D1 (CVBS) video inputs; Compatible with PAL and NTSC mixed input;
	Resolution	1024*600
Power and power consumption	Power management	Adaptive wide-format power input with protection functions such as low voltage, over voltage, and reverse short circuit;
	DC: +12V ~	DC+12V-36V
	Output voltage	+12V
Working environment	Power consumption	Normal working status <5W (without display and camera)
	Temperature	-30°C ~ +70°C
	Humidity	20% ~ 80%


Functions Description

1. Press the MENU button to enter the **IMAGE SETTING**.

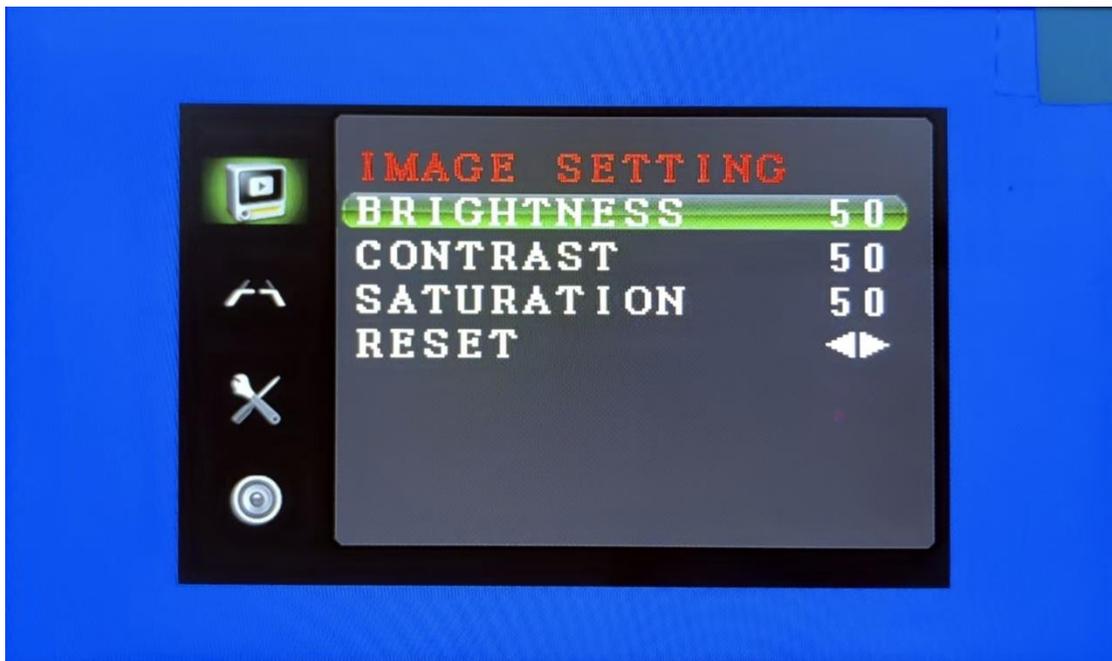

Using button 6 or button 7 to choose "BRIGHTNESS" or "CONTRAST" or "SATURATION" or "RESET" settings, use button 2 or button 4 to set the value. Use button 2 or button 4 to restore default settings;

2. Press the MENU button to enter the **GENERAL SETTING**.

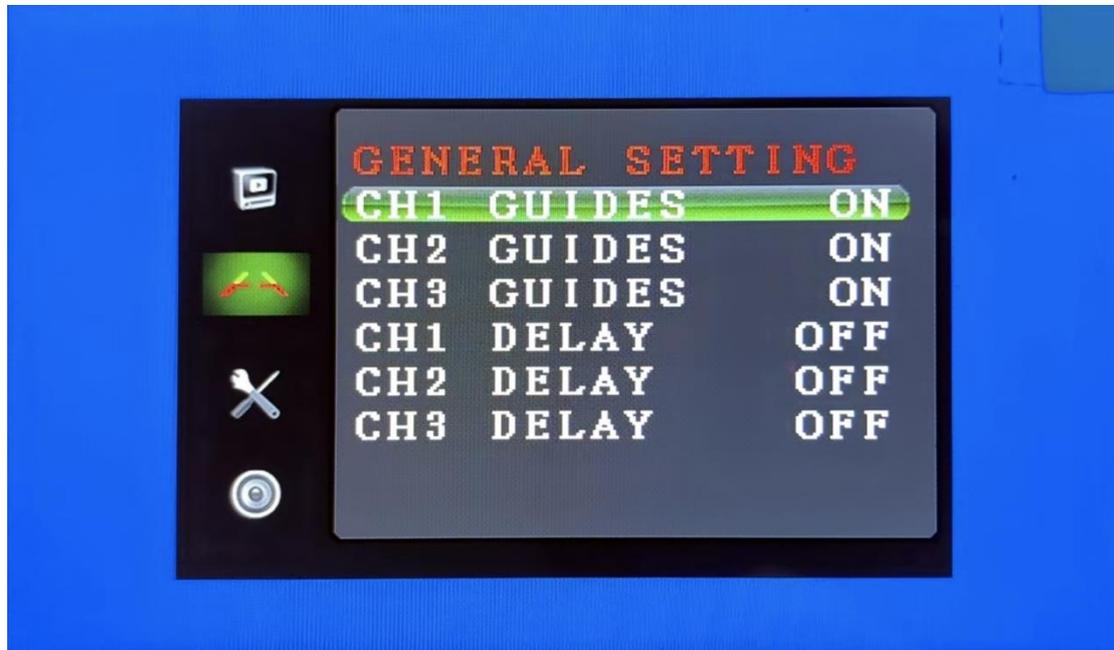

Using button 6 or button 7 to choose CH1/CH2/CH3's "GUIDES" settings, use button 2 or 4 to turn on and off it. After trigger wire is activated, the parking lines will be turned on or off.

Using button 6 or button 7 to choose CH1/CH2/CH3's "DELAY" settings, use button 2 or 4 to turn on (1-15 seconds settable) or off it. After correspond trigger wire is activated, the triggered displayed image will keep showing for the set period (1-15 seconds) before switching to the default image.

3. Press the MENU button to enter the **SYS SETTING**.



Using button 6 or button 7 to choose the languages settings— English, Russian,Japanese,Korean.

Using button 6 or button 7 to choose the UPSIDE DOWN setting, use button 2 or button 4 to turn on or off it. If turn it on, you can install the monitor's U bracket to the ceiling of your vehicle.

Using button 6 or button 7 to choose MIRROR setting, use button 2 or button 4 to turn on or off the mirrored or un-mirrored function.

Wiring Diagram

