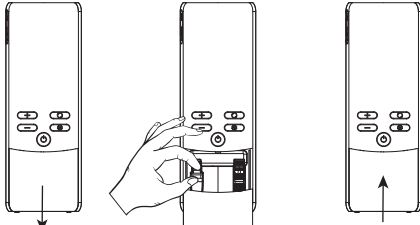
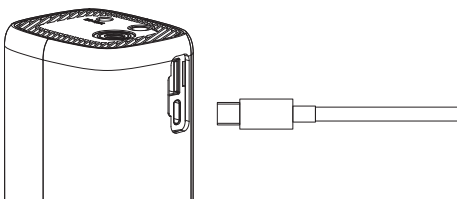
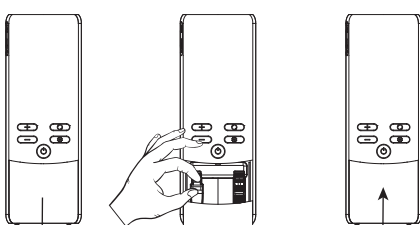


CAR AIR PUMP USER MANUAL MODEL: A18-2  Thank you for purchasing this device. Prior to use, read and understand product safety information booklet and this user manual.	WARNINGS Warnings! 1. Please keep this device away from children. 2. Read and understand all safety information before using. 3. Please check this device carefully before using. Do not use it if found any unusual situations. Warnings! Make sure to set correct pressure 1. The correct pressure is important. 2. This device is not suitable for tires that require high capacity/high pressure. 3. Before setting pressure, please make sure to set the correct pressure unit, otherwise it may lead to a tire explosion and other accidents. 4. Please make sure that the tire is inflated according to automobile manufacturer recommended tire pressure and check the spare tire regularly. Warnings! It could be dangerous if improper use 1. Please use this device in a safe area. 2. Please use this device in a dry and clean environment. Mud and dust intrusion may damage this device. 3. Do not break the air tube while inflating and keep the air flow clear. 4. When this device is working, the operator shall not leave and observe the charging process to prevent the charging pressure from being too high without presetting pressure. 5. It may be dangerous to be under-inflated or over-inflated(Do not over-inflated). 6. This device is built in dc motor, which may cause electric spark when working, please do not use it in inflammable and explosive environment. 7. The temperature of the air tube will be high if works too long. If this device gives abnormal noise or temperature is too high, please turn off immediately and wait for it to cool down before using. 8. Do not recommend to continue using this device for more than 10 minutes at a time. Please turn off immediately and wait for it to cool down before using. 9. When charging this device, please use CCC certified or other chargers. 10. This device is no-waterproof and do not flush with water.	PRODUCT OVERVIEW Battery capacity display USB output Type-C input Real-time pressure Preset pressure Pressure + switch Pressure - switch Power switch Accessories storage bin LED Air hose interface Function switch LED switch Air hose Inflatable needle Inflatable nozzle switcher French inflatable nozzle Charging cable	PRODUCT SPECIFICATIONS Model: A18-2 Type-C input: 5V==2A USB output: 5V==2.1A Battery: 2500mAhx2/18.5Wh Accessories: Inflatable nozzle switcher, Inflatable needle French inflatable nozzle, Air hose, Charging cable Power: 75W Noise: ≤85dB Working temperature: 0°C-35°C	SCREEN DISPLAY  1. Long press power switch 2 seconds, the screen will light up (as shown in the picture), then the display will stay on the car icon(the default setting for the first time). 2. Click function switch to set different inflatable objects, the screen will display preset pressure of the corresponding inflatable object. 3. Battery power supply: when the battery is less than 5%, battery symbol is white flashing and first, second, third and fourth cell are off; When this device is charging, battery symbol 4 cell is flashing one by one; When this device is full, battery symbol 4 cell is white.	INFLATABLE NOZZLE SET 1. Slide down and take out inflatable nozzle set; 2. Slide up and close accessories storage bin. 	FREQUENTLY ASKED QUESTIONS Q: This device does not stop when it reaches to preset pressure A: 1. Check whether to operate correctly according to the set instructions. 2. Check whether the preset pressure is correct. Q: The screen display is inaccurate or unavailable A: After connect this device to inflatable object, please make sure the screen show real-time pressure before start to inflate. Q: This device is working but unable to inflate A: Check inflatable nozzle is properly connected to inflatable object.	
				HOW TO USE SWITCH Power switch: long press power switch 2 seconds enter into standby state, click again to start inflating; after inflation(when the pressure reaches preset pressure, this device will stop working automatically), long press power switch 2 seconds again to turn off. Function switch: click the function switch to set different inflatable objects(car, motorcycle, bicycle, ball, customize) and different inflatable pressures(psi, bar, kpa, kg/cm²). LED switch: long press the LED switch 2 seconds to turn on, click to switch SOS and spotlight, long press the LED switch 2 seconds again to turn off. Pressure + switch: pressure increases with each click. Pressure - switch: pressure decreases with each click. Note: LED can be used whether this device is on/off.	HOW TO USE CAR AIR PUMP 1. Connect inflatable nozzle to inflatable object(set corresponding inflatable nozzle according to inflatable object); 2. Long press power switch 2 seconds enter into standby state; 3. Click function switch enter into preset state; 4. Click function switch again and set inflatable objects one by one; 5. Long press function switch 2 seconds, the inflatable pressure icon will flash, then click function switch to set corresponding inflatable pressure one by one; (You can set inflatable pressure only when the inflatable pressure icon flashes. The inflatable pressure icon will stop flashing if there is no operation within 2 seconds, you need to long press function switch 2 seconds again and set again.) 6. If preset pressure matches to inflatable object, click power switch to inflate; If preset pressure doesn't match to inflatable object, click pressure + switch or pressure - switch to set matchable pressure and then click power switch to inflate; 7. After inflation, long press power switch 2 seconds to turn off and remove the inflatable nozzle.	HOW TO CHARGE CAR AIR PUMP When this device is in turn off state, connect USB-C charging cable to this device to begin charging. 	
	< 01 >	< 02 >	< 03 >	< 04 >	< 05 >	< 06 >	

车载充气泵 使用说明书 型号: A18-2  感谢您购买及使用本产品! 为了给您带来更好的使用体验,在使用产品前请仔细阅读本说明书,并请妥善保管,以便日后参考。	注意事项 使用前请注意 1.本产品应在远离儿童的地方放置和使用。 2.使用前,请认真阅读并确保已完全理解本操作说明。 3.使用前请先进行检查,如发现异常现象,请勿使用。 警告!请确认已选择了正确的气压! 1.正确的气压非常重要。 2.本产品不适用于要求高容量/高气压的轮胎。 3.设定充气压力前,请确认选择了正确的计量单位,否则可能会导致爆胎等事故。 4.请确保按照汽车制造商建议的气压对轮胎充气以及对备胎作定期检查。 警告!使用不当可能会引发危险! 1.请在安全区域使用。 2.请在干燥清洁的环境中使用,泥沙灰尘侵入有可能导致产品损坏。 3.充气时不要折压气管,请保持气流畅通。 4.充气泵工作时,操作人员不可离开现场,并需观察充气过程,防止未设定预设气压时充气压力过高。 5.充气不足或者充气过满都可能产生危险(请勿充气过满)。 6.产品内置直流电机,工作时可能会产生电火花,请勿在易燃易爆环境中使用。 7.长时间工作时充气管温度会较高,如果充气泵发出异响或温度过高请立即关机,待其冷却后再使用。 8.建议一次连续使用不要超过10分钟,超过10分钟时请关机待其冷却后再使用。 9.使用充电器供电时请购买或配套使用获得CCC认证并满足标准要求的充电器。 10.产品不防水,禁止用水冲洗。	产品概况 电量显示 USB输出 Type-C输入 实时气压值 预设气压值 气压+键 气压-键 电源键 配件收纳仓 LED 气管接口 功能键 照明键 气管 气针 充气嘴转换头 法式气嘴 充电线	产品参数 型号: A18-2 Type-C输入: 5V==2A USB输出: 5V==2.1A 电池: 2500mAhx2/18.5Wh 产品配件: 充气嘴转换头、气针、法式气嘴、气管、充电线 额定功率: 75W 噪音: ≤85dB 工作温度: 0°C-35°C	屏幕显示说明  1.长按电源键 2秒,屏幕显示亮起(如图),随后显示停留在汽车图标上(初次使用时默认设置)。 2.单击功能键选择不同的充气对象时,屏幕会显示相应充气对象的预设气压值。 3.电量显示:电量低余5%时,电池符号外框闪烁白灯,第1234格熄灭;充电时,电池符号从左到右依次4格闪烁;充满时,电池符号4格全亮白灯。	充气泵使用说明 1.连接充气嘴(根据充气对象选择对应的气嘴); 2.长按电源键2秒开机; 3.单击功能键进入预设模式; 4.再次单击功能键选择充气对象; 5.长按功能键2秒,待充气单位符号闪烁,单击功能键选择充气单位(只有在充气单位符号闪烁时才可以选择充气单位,如设定过程中2秒无操作,则闪烁停止,需再次长按功能键2秒且再次设定); 6.如果预设气压值符合充气对象,则单击电源键为充气对象充气;如果预设气压值不符合充气对象,则按气压+键/气压-键来调整到符合充气对象的气压值,然后单击电源键开始充气; 7.充气完毕,再次长按电源键2秒即可关机,拧开充气嘴即完成充气。	充气嘴套装 1.往下滑动收纳盖,取出气嘴套装; 2.往上滑动关闭收纳仓。 	常见问题解答 问题1:充气泵达到设定值不停止 答:1.检查是否正确按照设定说明操作。 2.检查设定值是否正确。 问题2:屏幕显示读数不准确或无法获取 答:连接充气对象,在开启充气泵前,确保屏幕显示的是轮胎当前气压。 问题3:充气泵在运行但无法充气 答:检查充气嘴是否与轮胎气门连接好。

80g书纸 单黑双面印刷 尺寸:80*110mm