

elinz™

USER MANUAL

BCPBPD38




GENERAL INFORMATION

The BCPBPD38 Wireless Charging Power Bank is a 10,000mAh Lithium-Polymer power bank with a wireless transmitter and rechargeable battery. This provides you with the flexibility to charge your devices wirelessly or with a charging cable whenever or wherever you go. This power bank can charge up to four devices simultaneously, including your Apple smart watch magnetic charging.

CHARGING THE POWER BANK

- Before using the wireless power bank for the first time, please charge the power bank fully. We recommend a USB Adapter that supports 5V/3A to charge through the Type-C USB interface. USB Adapter is not included.
- To utilize the fast-charging feature, it's recommended to use a PD3.0 charger that supports 9V/2A or 12V/1.5A to quickly charge through the Type-C USB interface. A green indicator will light up next to the battery level indicator.
- When charging, the LED indicators will blink. Each light indicates a 25% charge. When fully charged, all LED lights will stop blinking

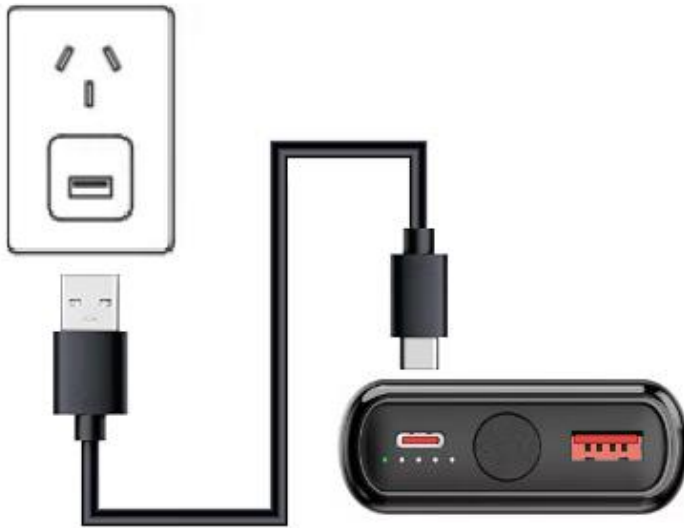

CHECKING THE REMAINING BATTERY POWER

Check the remaining battery power by pressing the power button. The indicator lights alerts you to the remaining battery power.

Remaining battery power	Indicator light status
100 %	Four indicator lights on
75 %	Three indicator lights on
50 %	Two indicator lights on
25 %	One indicator light on
0 %	No indicator lights on

WIRELESS CHARGING MODES

To activate wireless charging mode for mobile phone, press the power button turn the power bank on. The blue indicator light will blink which means power bank is now ready for wireless charging.



Place your wireless compatible smartphone onto the power bank making sure it is centered on the wireless icon. Check that the charging icon is displayed on your smartphone so you can confirm wireless charging is working. You will also see a solid blue indicator light indicating that it is wirelessly charging your device.

This power bank supports 5W/7.5W/10W/15W wireless charging. Many newer smartphones incorporate fast charging technology that enables them to draw more power when charging. Wireless charging speeds can increase when phone manufacturers update their operating systems accordingly.

To guarantee that your phone will charge faster, you need to use a cable.

To activate Magnetic charging mode for Apple smart watch, you need to press and hold the power button for 3 seconds until the blue light indicator blinks and stops.




Place your Apple Watch onto the power bank same as the in the image above; the concave part of the power bank magnetically snaps to the back of your Apple Watch and aligns it properly. Check that the charging icon is displayed on your smart watch so you can confirm wireless charging is working. It will charge the smart watch wirelessly at 3W.

WIRED CHARGING

This power bank also supports wired charging through its Type-A USB port. It uses 5V/4.5A (maximum of 22.5W) SCP mode to quickly charge HUAWEI phones, the original HUAWEI charging cable needs to be used.

It can charge up to 4 devices simultaneously, the output would be automatically adjusted to 5V. This power bank supports 3 fast charging protocols 1st one is Huawei's SCP (Super Charge Protocol) 22.5W where it can supply 4.5V/5A on some Huawei phone models, 2nd is PD3.0 20W (USB Type-C interface) for iPhone and 3rd one is QC3.0 18W (USB Type-A interface) for Android phones. Please note that charging speeds will vary between phone models and manufacturers.

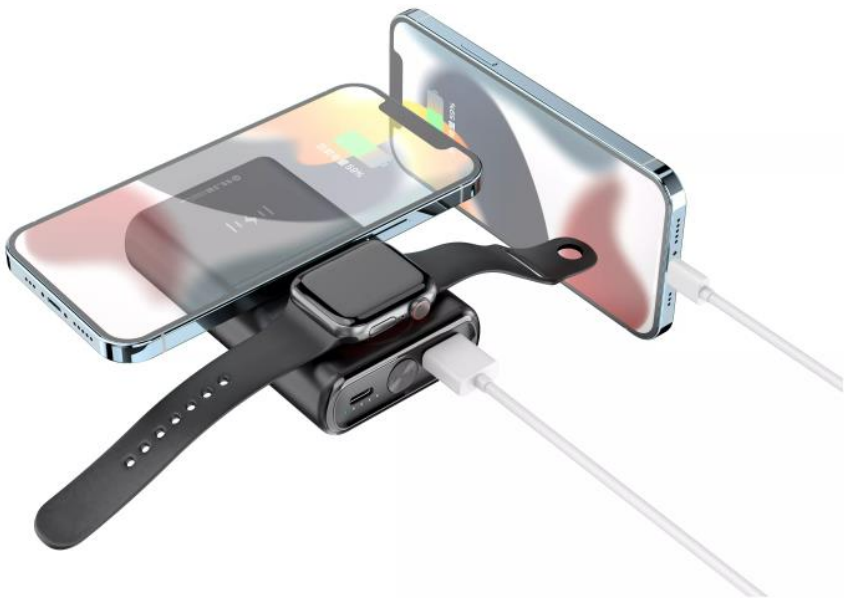

PRODUCT DETAILS



IMPORTANT SAFETY PRECAUTIONS

Please note the following precautions before initial use. Failure to comply may be dangerous and cause damage to your mobile devices.

- If the Power Bank does not respond once it is powered on, the battery level may be low. Follow the instructions for charging the Power Bank and check the LED battery capacity indicator. The indicator will flash as the Power Bank begins charging.
- Charge the power bank fully before initial use. The unit only achieves maximum performance after 2 or 3 full charging and discharging cycles.

- Always recharge the power bank in a well-ventilated area. Do not leave the power bank in hot or cold places.
- Do not immerse the power bank in water or expose it to moisture or weather conditions.
- Do not drop, knock, or shake the power bank. Rough handling can damage the internal precision component and its board.
- Keep the power bank away from children; this device is not a toy. While charging, the power bank's casing may become warm, which is normal as the charging and discharging processes generate heat.
- Keep the power bank away from fire or other sources of heat.
- Exposing the power bank to high temperatures may cause it to explode.
- Do not short-circuit the power bank, as this may cause damage to the unit.
- Unauthorized changes or modifications may void your right to use this product.
- While using the power bank, always comply with any special regulations that may apply to the area you are in and always turn off your mobile device when its use is prohibited. For example: do not use the power bank during flight, takeoff or landing, near medical equipment, as it may cause interference or damage

MULTI-SAFETY PROTECTION

1. **Over-charge Protection** - Detects the state of the battery and stops the charging process when the power bank is at 100%.
2. **Short circuit Protection** - Disables discharging if a short circuit is detected.
3. **Over-Voltage Protection** - Disables charging when the battery voltage goes above a safe threshold.
4. **Over-Current Protection** - Disables charging when the battery current goes above a safe threshold.
5. **Over-Discharge protection** - Disables discharging when the battery voltages goes below a threshold.

SPECIFICATIONS

Battery Capacity 10000mAh/37Wh

Type C Input: 5V/3A 9V/2A 12V/1.5A

Type C Output: 5V/3A 9V/2.2A 12V/1.67A

USB Type-A Output (QC3.0+SCP): 4.5V/5A 5V/3A 9V/2A 12V/1.5A

Wireless Output: 5W/7.5W/10W/15W

Max Power: 22.5W

PD 3.0: Support

QC 3.0: Support

Material: ABS Plastic

PACKING LIST

1x Power Bank

1x USB Type-C Charging Cable

1x User Manual

For questions, support, or warranty claims feel free to contact us at 1300 881 773, send us an email at sales@elinz.com.au or chat with us. www.elinz.com.au